


# BATTERY FOR MWD/LWD

## MAIN CHARACTERISTICS


- ∨ 3.6V Li/SOCI<sub>2</sub> (Lithium Thionyl Chloride)
- ∨ Gallium Electrolyte
- ∨ High Capacity
- ∨ Extreme Shock and Vibration resistance

### DD-HR 150

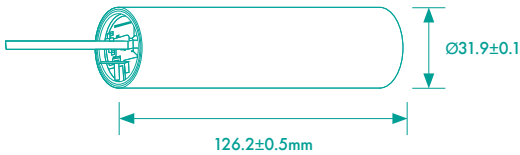


Capacity	26Ah~28Ah
OCV at 20°C	3.65V
CCV at 25°C, 320mA	3.2V
Constant Current Discharge	580mA, 1300mA
Temperature	-40°C to 150°C
Diameter	31.9mm (1.26 in)
Height	126.2mm (4.97 in)
Weight	230g
Lithium Metal Content	8.02g

### DD-HR 165

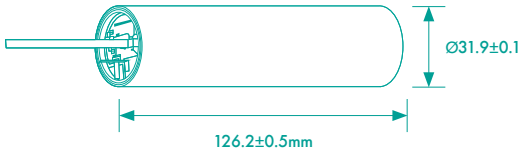

Capacity	22.0Ah
OCV at 20°C	3.65V
CCV at 25°C, 320mA	3.2V
Constant Current Discharge	580mA, 1300mA
Temperature	-40°C to 165°C
Diameter	31.9mm (1.26 in)
Height	126.2mm (4.97 in)
Weight	230g
Lithium Metal Content	7.10g

### DD-HR 100

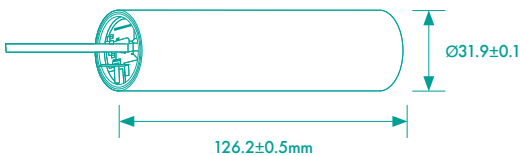

Capacity	30.0Ah
OCV at 20°C	3.65V
CCV at 25°C, 320mA	3.2V
Constant Current Discharge	580mA, 1300mA
Temperature	-40°C to 100°C
Diameter	31.9mm (1.26 in)
Height	126.2mm (4.97 in)
Weight	230g
Lithium Metal Content	8.70g

## NOTE

- ∨ Storage cells in a cool (<30°C) and dry condition.
- ∨ Any information given here is for reference only.
- ∨ Information is also dependent on actual conditions and subject to change without notice.