


BATTERY FOR

# PIGGING & OCEAN EQUIPMENT

## MAIN CHARACTERISTICS


- ∨ 3.9V Li/SO<sub>2</sub>Cl<sub>2</sub> (Lithium Sulfuryl Chloride)
- ∨ High Rate Capability
- ∨ High Capacity
- ∨ 100°C Operational Temperature
- ∨ ATEX approved

### DD-SC 100

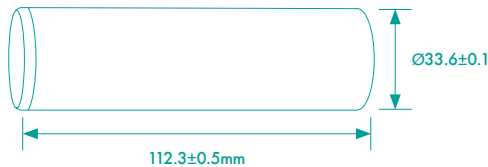


Capacity .....	27Ah~32Ah
OCV at 20°C .....	3.91V
CCV at 25°C, 425mA .....	3.4V
Constant Current Discharge .....	580mA, 2,000mA
Temperature .....	-30°C to 100°C
Diameter .....	33.6mm (1.32 in)
Height .....	112.3mm (4.42 in)
Weight .....	213g
Lithium Metal Content .....	9.60g

### D-SC 100



Capacity .....	12Ah~15Ah
OCV at 20°C .....	3.91V
CCV at 25°C, 200mA .....	3.4V
Constant Current Discharge .....	280mA, 1000mA
Temperature .....	-30°C to 100°C
Diameter .....	33.6mm (1.32 in)
Height .....	60.3mm (2.37 in)
Weight .....	122g
Lithium Metal Content .....	4.70g

### C-SC 100



Capacity .....	4Ah~7Ah
OCV at 20°C .....	3.91V
CCV at 25°C, 80mA .....	3.4V
Constant Current Discharge .....	175mA, 600mA
Temperature .....	-30°C to 100°C
Diameter .....	25.5mm (1.00 in)
Height .....	49.1mm (1.93 in)
Weight .....	59g
Lithium Metal Content .....	2.40g

## NOTE

- ∨ Storage cells in a cool (<30°C) and dry condition.
- ∨ Any information given here is for reference only.
- ∨ Information is also dependent on actual conditions and subject to change without notice.